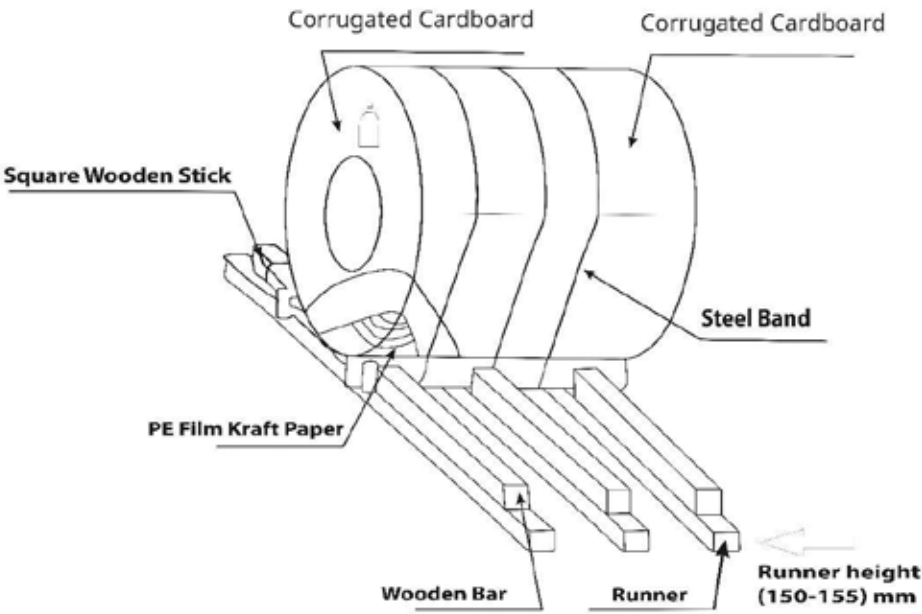


Coil Packing	
Spool Length	0, +10mm Spool protrudes from both ends, 0, +10mm on each side.
Packaging	Eye to wall.
	Packaging must be tight and in good condition to prevent coils from effects of corrosion, external force and environment condition through marine transport, especially free from corrosion on the coil surface during transportation. Bottom runner height should be (150-155) mm.
	Sufficient amount of desiccant must be properly placed in package in order to prevent moisture.
Crosser	Fumigated wooden pallets
Coil Label	Marked to indicate Coil weight, Produce Date, Supplier's Name, PO No, Coil No, Alloy, Temper, Size and Coil Unwind Direction, Made in China.
Standard Packing	 The diagram illustrates the standard packing of a coil. It shows a cylindrical coil resting on a wooden pallet. The coil is wrapped in corrugated cardboard, with a steel band securing it. A square wooden stick is placed across the top of the coil. The pallet is made of wooden bars and runners. A PE film Kraft paper is shown wrapping the bottom of the coil. The runner height is indicated as 150-155 mm.